

Instant Boiling Water Dispensers

PRODUCT FEATURES

- > Eliminates the wait time for boiling water, enhancing efficiency
- > Step-by-step heating can adjust the heating power in real-time according to water usage
- > Wall-mounted design saves counter space and provides a sleek, modern look
- > Dual over-temperature protection to ensure user safety
- > Simple lever dispenses instant boiling water
- > Internal copper tank which, increasing durability and efficiency
- > For the supply of instant boiling water to commercial kitchens, office break rooms, staff kitchens, canteens and hospitality environments.




SPECIFICATIONS

Model	2.5L	5L	7.5L
Product No.	2850205	2850215	2850225
Storage capacity	2.5L	5L	7.5L
Max. Water Supply Pressure, kPa	800	800	800
Min. Water Supply Pressure, kPa	50	50	50
Cold Water Connection	1/2" BSP	1/2" BSP	1/2" BSP
Overflow Vent Connection	1/2" BSP	1/2" BSP	1/2" BSP
Supply Voltage, V	220 – 240 AC 50 Hz	220 – 240 AC 50 Hz	220 – 240 AC 50 Hz
Electrical Connection	10A 3pin plug	10A 3pin plug	10A 3pin plug
Heating Element kW	1.8	2.0	2.0
Approx. Weight Empty, kg	6.6	8.5	8.7
Approx. Weight Full, kg	10.7	16.3	18.3
Approx. Time to Heat, to full capacity, mins	12	15	22
Dimension, W x H x D (to lever) mm	275 x 365 x 263	320 x 448 x 293	320 x 448 x 293
WaterMark Approval	WM 040339 (AS 3498)	WM 040339 (AS 3498)	WM 040339 (AS 3498)
Warranty	2 Years	2 Years	2 Years

FRONT VIEW

SIDE VIEW

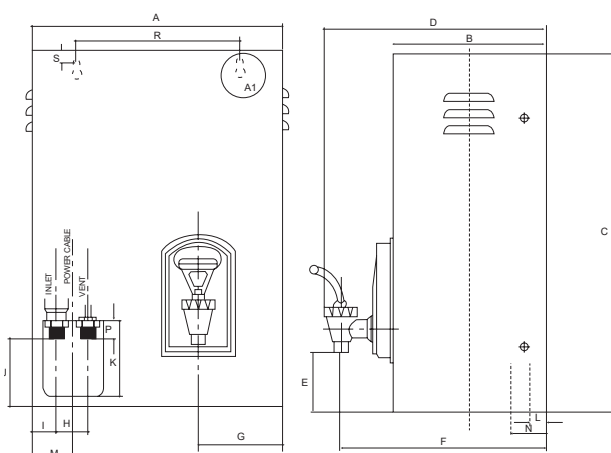

DIMENSION (mm)

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	R	S
2.5L	275	165	365	263	82	243	110	33	28	95	93	18	49	45	20	198	16
5L	320	195	448	293	82	273	110	33	28	95	93	18	49	45	20	198	16
7.5L	320	195	448	293	82	273	110	33	28	95	93	18	49	45	20	198	16

