TECHNICAL DATA SHEET

Single Phase Electric Instantaneous Water Heater

PRODUCT FEATURES

- Space saving and compact, ideal for installation where space is limited
- Electronically controlled to maintain a consistent outlet temperature
- Delivers water not exceeding 45°C in accordance with AS3498
- No flue, ventilation or safe trays required
- Automatic power adjustment based on flow rate compensates for variations in inlet water temperature and pressure
- Electronic protection system combines temperature safety cut-off with intelligent flow control to ensure safe, reliable operation

SPECIFICATIONS

Model	Single Phase 6.3kW
Product No.	2850117
Type	Instantaneous
Voltage, V	230
Rated Power, kW	6.3
Rated Current, A	28
Hot Water Delivery, L/min (at ΔT=20°C)	4.4
Min. Flow Rate, L/min	2
Max Inlet Pressure Rating, kPa	750
Min Inlet Pressure Rating, kPa	100
Temperature, °C	45°C maximum, non-adjustable
Dimension, W x H x D mm	270 x 245 x 60
Weight, kg	2.5
IP Rating	IPX4
Water Connections	G1/2" Male
WaterMark Approval	WM 40394 (AS 3498)
Warranty	2 Years

FRONT VIEW

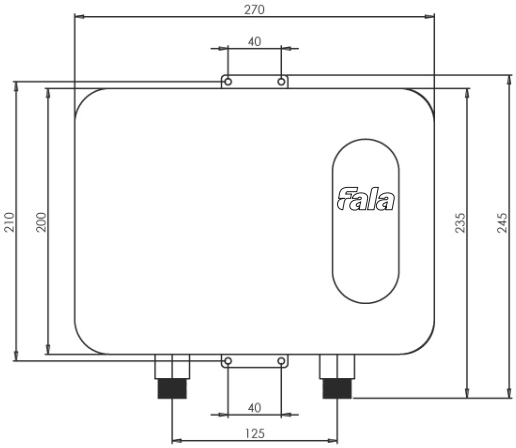

SIDE VIEW

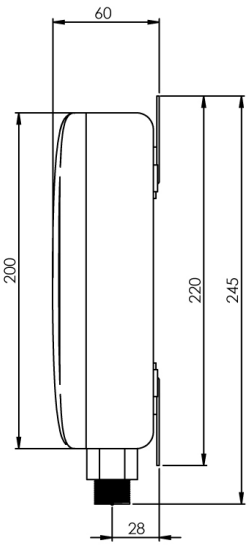

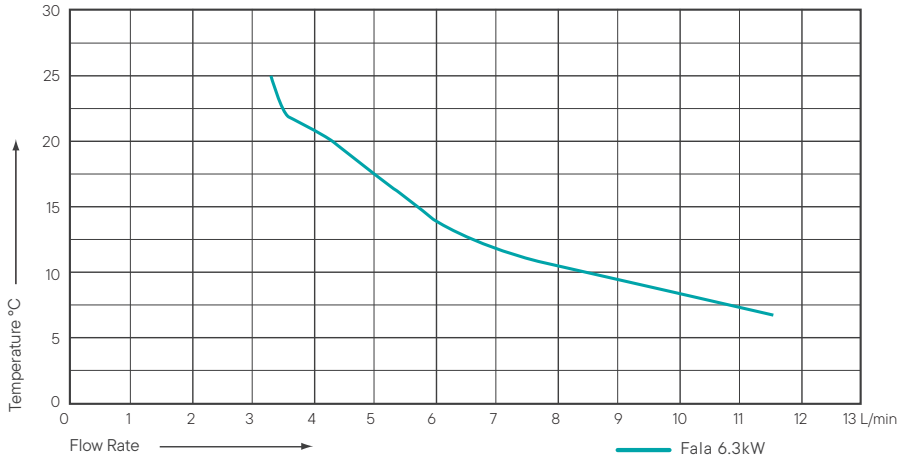

Lead Free
AS 3498
WM-040394

Phone 1300 376 642 **Falawater.com**