TECHNICAL DATA SHEET

Single Phase Electric Instantaneous Water Heater

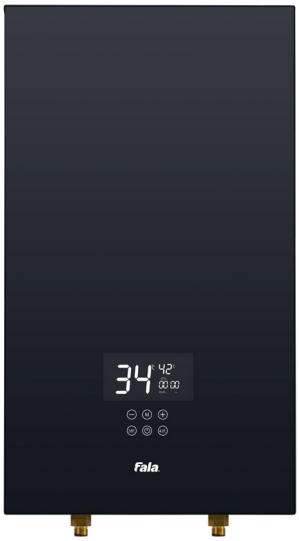

PRODUCT FEATURES

- Sleek and stylish finish, easily installed into tight spaces
- Electronically controlled to maintain a consistent outlet temperature
- Delivers water not exceeding 50°C in accordance with AS3498
- Designed to support multi point-of-use applications
- Automatic power adjustment based on flow rate compensates for variations in inlet water temperature and pressure
- Electronic protection system combines temperature safety cut-off with intelligent flow control to ensure safe, reliable operation
- No flue, ventilation or safe trays required

SPECIFICATIONS

Model	Single Phase 8.5kW
Product No.	2850119
Type	Instantaneous
Voltage, V	230V
Rated Power, kW	8.5kW
Rated Current, A	37
Hot Water Delivery, L/min (at ΔT=20°C)	5.5
Min. Flow Rate, L/min	2
Max Inlet Pressure Rating, kPa	750
Min Inlet Pressure Rating, kPa	100
Temperature, °C	30 - 50°C
Dimension, W x H x D mm	280 x 505 x 60
Weight, kg	5.4
IP Rating	IPX4
Water Connections	G1/2" Male
WaterMark Approval	WM 40394 (AS 3498)
Warranty	2 Years

FRONT VIEW

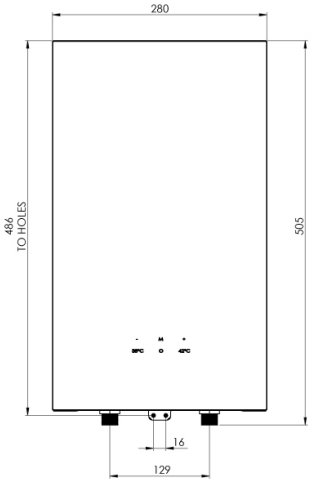

SIDE VIEW

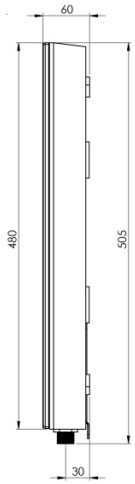

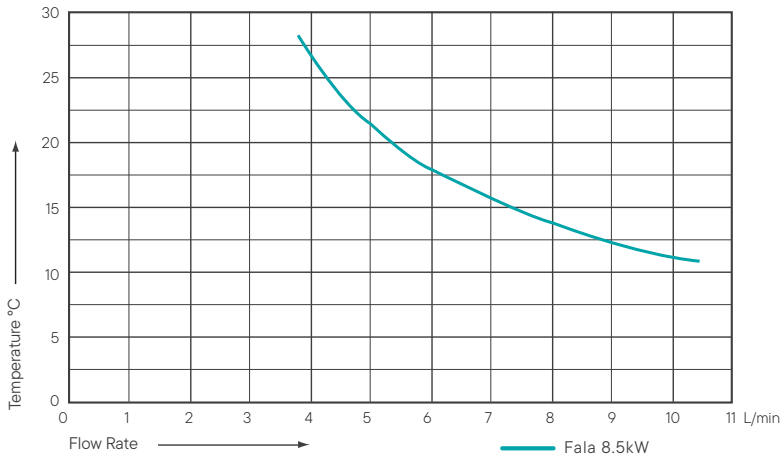

Lead Free
AS 3498
WM-040394

Phone 1300 376 642 **Falawater.com**